



The Power Behind Competitiveness

Delta RPI-H3

Grid-Tied Solar Inverter
RPI-H3



Product Features

- Transformerless Inverter
- Peak Efficiency up to 97.0%
- Reactive Power Control
- Ergonomic Grip Design
- Ultra Compact Size
- Built-in Energy-logger
- IP65 Protection Level
- Built-in DC Switch


www.deltaelectronicsindia.com



DELTA
Smarter. Greener. Together.

Delta RPI-H3

With Delta's cutting-edge technology, the home series Solar Inverters are with efficiencies as high as 97.0%. These inverters are compact in size with durable quality to ensure smooth PV system operation. IP65 enclosure provides higher level of protection and enhances its durability in a harsh outdoor environment.

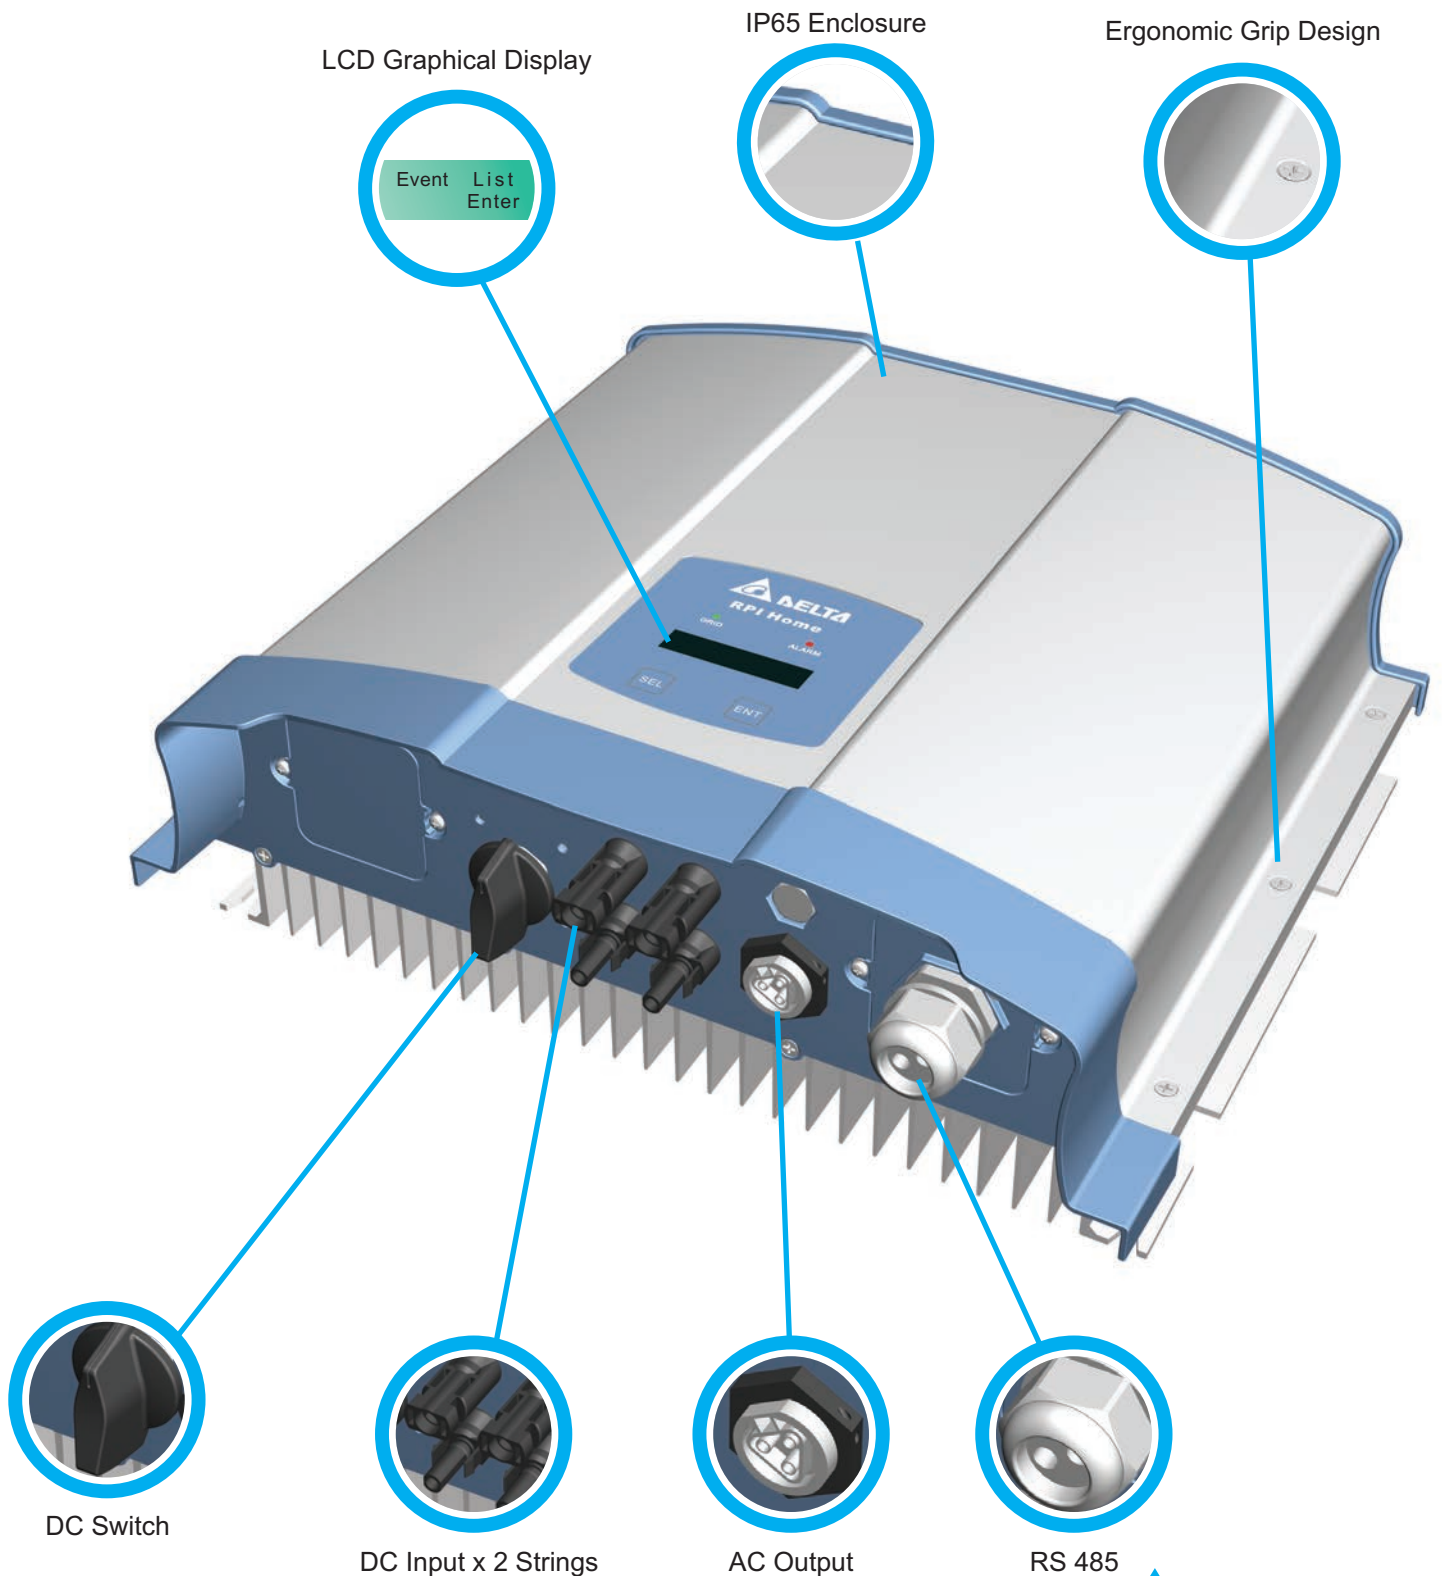

LCD Graphical Display

IP65 Enclosure

Ergonomic Grip Design

Event List Enter

DC Switch

DC Input x 2 Strings

AC Output

RS 485

Delta RPI-Home Series

Technical Data RPI-H3

INPUT (DC)	RPI-H3
Recommended Max. DC Power	3200W
Max. Input Voltage	550 V
DC Voltage Range	125 - 550 V
Start-up Voltage	>150 V
Start-up Power	10W
MPPT Voltage Range	125 - 550 V
MPP Voltage Range, Full Power	320 - 500 V
Nominal DC Voltage	350 V
Total Input Current	10 A
Maximum Short Circuit Current	13.9A
No. of Independent MPP Trackers	1
Input Connection Type	2 pair MC4
DC Disconnection Switch	Yes (Inbuilt)

OUTPUT (AC)	
Rated Output Power	3 kVA
Maximum Output Power	3 kVA
Rated Output Current	13 A
Max. Output Current	14.3 A
Inrush Current	30A / 1ms
Nominal AC Voltage	1 Ph, 230 V
AC Voltage Range	230 V \pm 20 % (184~276)
Nominal Frequency	50 Hz
Frequency Range	45 Hz - 55 Hz
Power Factor at Rated Power	Unity
Reactive Power (Adjustable)	0.8 Lagging ~ 0.8 Leading
Harmonics	<3% at Rated Power
DC Injection	<0.5% at Rated Output Current
No. of Conductors	3 Wire (L, N, PE)

EFFICIENCY	
Maximum Efficiency	97.00%
Euro Efficiency	96.20%

PROTECTION	
Input-side Disconnection Device	Yes
Ground Fault Monitoring / Grid Monitoring	Yes
DC Reverse Polarity Protection	Yes
DC Over Voltage / Current Limitation Protection	Yes
AC Short Circuit Protection	Yes
AC Over Voltage / Current Limitation Protection	Yes
DC / AC Side Surge Protection - Inbuilt	Yes, MOV

GENERAL DATA	RPI-H3
Dimension (H/W/D)	367 x 420 x 157 mm
Weight (kg)	15
Operating Temperature Range	- 20 °C to + 60 °C (Full Power - 20 °C to + 40 °C)
Relative Humidity	0~95%, Non-condensing
Operating Elevation	< 2000 m
Degree of Protection	IP65
Noise Level (Typical)	<35 dB (1m Front Panel)
Self Consumption at Night	< 1 Watt

SAFETY/STANDARDS	
Anti-islanding Protection / Grid Regulation	DIN VDE V 0124-100; VDE 4105
EMC	EN 61000; IEC 61000
Safety	IEC/EN 62109
Efficiency	IEC 61683
Environmental Testing	IEC 60068-2 (1,2,14,30) (As Per MNRE Requirement)
Ingress Protection	IEC 60529

COMMUNICATION	
Communication Interface	MODBUS RTU over RS 485 Physical Layer
Graphical Display	LCD 16 Characters x 2
Built-in Energy Data Logger	Yes

WARRANTY	
Standard Warranty	5 Years

Notes

- 1.If PV Module is grounded (Negative / Positive Grounding), separate Isolation Transformer is required at the Grid interface of Inverter
- 2.Parallel Operation of Inverters is possible for large Power Plants
- 3.Installing SPDs for PV and AC circuit is recommended
- 4.Refer to Delta's Standard Warranty Terms and Conditions for more details

For Any Sales / Application Engineering Support, Please Contact :

DELTA POWER SOLUTIONS (INDIA) PVT. LTD.,

"A" Block, Third Floor, Ozone Manay Tech Park, Hongasandra Village, Hosur Road, Bangalore – 560 068, INDIA

TEL +91 80 6716 4646

Fax +91 80 6716 4784

www.deltaelectronicsindia.com | email: solarsales@deltaww.com